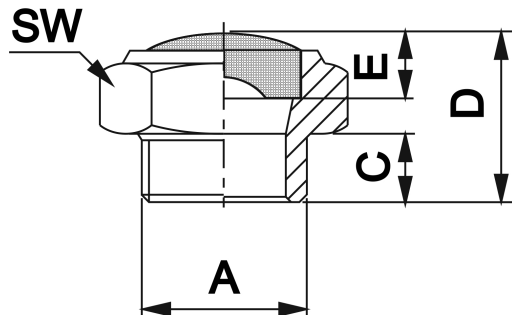


Schalldämpfer SFE mit Drahtgeflecht
Silencer SFE with inox wire


A	C	D	E	SW	Bestell-Nr.
M5	3,5	8,5	3	8	16.117.205
G 1/8	6,0	16,0	4	13	16.117.218
G 1/4	8,0	19,0	4	16	16.117.214
G 3/8	9,0	21,0	4	19	16.117.238
G 1/2	10,0	22,0	4	24	16.117.212
G3/4	10,0	27,0	4	30	16.117.234
G1	15,0	29,0	4	36	16.117.210

Material:
Körper: Messing
Filter: Edelstahl 1.4307
Filterfeinheit: 70 µm
Betriebsdruck: max. 10 bar
Betriebstemperatur: -20°C bis +150°C
Gewinde:
zylindrisch: DIN EN ISO 228
metrisch: DIN EN ISO 262

Material:
body: brass
filter: inox AISI 304 L
filter mesh: 70 µm
working pressure: max. 10 bar
working temperature: -20°C up to +150°C
threads:
cyl. Threads: DIN EN ISO 228
metr. Threads: DIN EN ISO 262